




人纤中效袋式过滤器 Synthetic Pocket Filter

UL Class 1

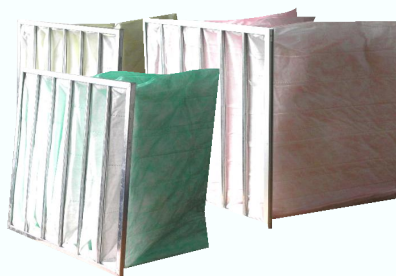

性能 Capacity

※外框: 镀锌板, 铝型材

Frame: Galvanized steel, extruded aluminum

※滤料: 化学纤维(人纤)

Media: Meltblown PP

※效率(Efficiency): ASHRAE 45%、65%、85%、95%

※标准(Standard): EN779 F5、F6、F7、F8

使用环境 Operating Conditions

※最高温度70℃ (Temperature: ≤70℃)

※最高湿度90%RH (Humidity: ≤90%RH)

技术参数 Technical Parameters

宽*高*深 W*H*D (mm)	袋数 Pockets	滤材面积 Area (m ²)	效率 Efficiency	风量 Airflow (CMH)	初压损 Initial Pressure (Pa)	风量 Airflow (CMH)	初压损 Initial Pressure (Pa)※
592*592*600	8	6.40	F5	2540	30	3800	45
			F6		40		60
			F7		75		110
			F8		85		130
592*592*600	6	4.97	F5	2540	35	3800	50
			F6		50		75
			F7		80		120
			F8		90		135
490*592*600	5	4.13	F5	2100	35	3140	50
			F6		50		75
			F7		80		120
			F8		90		135
287*592*600	3	2.46	F5	1240	35	1860	50
			F6		45		75
			F7		80		120
			F8		90		135
592*592*560	8	6.40	F5	2540	35	3800	50
			F6		45		65
			F7		80		120
			F8		95		140
490*592*560	6	4.53	F5	2140	35	3140	50
			F6		45		65
			F7		80		120
			F8		95		140
287*592*560	3	2.46	F5	1240	40	1860	55
			F6		55		80
			F7		85		130
			F8		95		145

建议终压损: 450Pa

Recommended final pressure: 450Pa

※Pressure range ± 15%.

特殊尺寸及规格可依客户要求制作。

Different sizes and specifications are available

应用场所 Applications

袋式过滤器广泛应用于中央空调通风系统、制药、医院、电子、食品等工业净化中, 还可作为高效空气过滤器的前端过滤。

Pocket filters have widespread application in central air conditioning ventilation systems, pharmaceuticals, hospitals, electronics, food processing, etc. They can also be used for secondary filtration.

昆山富雷克环保净化科技有限公司(中国)

Kunshan Fleco Filtration Co., Ltd.

地址: 中国江苏省昆山市环庆路1893-1号 邮编: 215316

Address: 1893-1 Huanqing Road, Kunshan, Jiangsu, China Zip: 215316

电话/TEL: 86-(0)512-57759300 传真/FAX: 86-(0)512-57759336

邮箱/E-mail: sales@flecofiltration.com.cn 网页/Web site: www.flecofiltration.com.cn