




# 初效可更换式及可清洗式过滤器 Replaceable & Washable Pre-filters

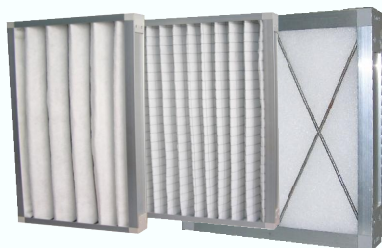

## 性能 Capacity

※效率 (Efficiency): 35%

## 使用环境 Operating Conditions

※最高温度80℃(Temperature: ≤80℃)

※最高湿度90%RH (Humidity: ≤90%RH)

## 技术参数 Technical Parameters

类型 Type	结构 Structure	宽*高*深 W*H*D (Inch)	宽*高*深 W*H*D (mm)	滤材面积 Area (m <sup>2</sup> )	风量 Airflow (CMH)	初压损 Initial Pressure (Pa)	风量 Airflow (CMH)	初压损 Initial Pressure (Pa)※
可更换 Replaceable	片式 Chip	12*24*1	290*595*20	0.16	1240	40	1550	60
		20*24*1	493*595*20	0.28	2110		2640	
		24*24*1	595*595*20	0.34	2540		3180	
	折景 Pleated	12*24*2	290*595*46	0.16	1240	65	1550	95
		20*24*2	493*595*46	0.28	2110		2640	
		24*24*2	595*595*46	0.34	2540		3180	
可水洗 Washable	折景 Pleated	12*24*2	290*595*46	0.36	1240	40	1550	62
		20*24*2	493*595*46	0.61	2110		2640	
		24*24*2	595*595*46	0.74	2540		3180	
	折景 Pleated	12*24*1	290*595*20	0.28	1240	80	1550	105
		20*24*1	493*595*20	0.49	2110		2640	
		24*24*1	595*595*20	0.56	2540		3180	
折景 Pleated	12*24*2	290*595*46	0.46	1240	45	1550	60	
	20*24*2	493*595*46	0.72	2110		2640		
	24*24*2	595*595*46	0.92	2540		3180		

建议终压损: 180Pa

Recommended final pressure: 180Pa

※Pressure range ±15%.

特殊尺寸及规格可依客户要求制作。

Different sizes and specifications are available

## 应用场所 Applications

一般应用于中央空调和集中通风系统、燃气轮机与空气压缩机预过滤。

Prefilters are generally used as primary filtration in central air conditioning and central ventilation systems, gas turbines, and air compressors.

## 使用材料表 Materials

可更换 Replaceable			可水洗 Washable	
	片式 Chip	折景 Pleated		折景 Pleated
外框 (Frame)	铝型材、镀锌板 (Extruded aluminum, galvanized steel sheet)	铝型材、镀锌板 (Extruded aluminum, galvanized steel sheet)	外框 (Frame)	铝型材、镀锌板 (Extruded aluminum, galvanized steel sheet)
滤料(Media)	无纺布 (Polyester)	无纺布 (Polyester)	滤料(Media)	无纺布 (Polyester)
支架(Support)	φ 3.2铁丝 (Wire)	φ 3.2铁丝 (Wire)	贴合网 (Face net)	点焊网、扩张网 (Spot mesh, expanded mesh)
护网 (Face net)	点焊网 (Spot mesh)	无 (None)		

昆山富雷克环保净化科技有限公司(中国)

Kunshan Fleco Filtration Co., Ltd.

地址: 中国江苏省昆山市环庆路1893-1号 邮编: 215316

Address: 1893-1 Huanqing Road, Kunshan, Jiangsu, China Zip: 215316

电话/TEL: 86-(0)512-57759300 传真/FAX: 86-(0)512-57759336

邮箱/E-mail: sales@flecofiltration.com.cn 网页/Website: www.flecofiltration.com.cn