




Washable Nylon Pre-filter

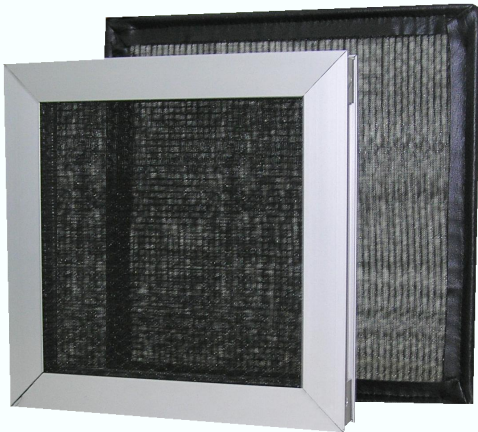

Features

- ※Outer frame: Extruded anodized aluminum frame or vinyl
- ※Thickness: 6mm, 8mm, 10mm or 20mm (6mm & 8mm without aluminum frame)
- ※Inner frame: 2-ply galvanized steel wire or stainless steel wire
- ※Media: PP, PE or PA, 2 or 4 layers
- ※Efficiency: G1~G2 (En779)
- ※Average arrestance: ≤65%

Technical Parameters

W*H (mm)	Area (m ²)	Efficiency	Net layer	Airflow (CMH)	Initial Pressure (Pa)※
295*595	0.34	G1	2	750	25
595*595	0.70	G1		1600	25
295*595	0.68	G2	4	750	30
595*595	1.40	G2		1600	30

※Pressure range ±15%.

Different sizes and specifications are available

Advantages

- * Washable, long service life, reuseable
- * Can handle high airflow volume
- * Low pressure drop
- * Acid-, alkali-, and humidity-resistant
- * High dust holding capacity
- * Lightweight
- * Easy to install

Applications

Nylon prefilters are widely used in fan filter units, indoor filtration systems, and systems with high air volume. Nylon prefilters are mainly used as a low-cost alternative to metallic prefilters in air conditioning systems.