




Replaceable & Washable Pre-filters

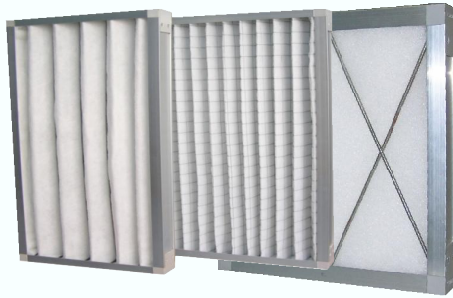

Capacity

※ Efficiency: G4(EN779)

Operating Conditions

※ Temperature: ≤70°C

※ Humidity: ≤90%RH

Advantages

※ Washable or replaceable, long service life

※ Large filtering surface area

※ High dust holding capacity

※ Easy to install

Technical Parameters

Type	Structure	W*H*D (Inch)	W*H*D (mm)	Area (m ²)	Airflow (CMH)	Initial Pressure (Pa)	Airflow (CMH)	Initial Pressure (Pa)※
Replaceable	Chip	12*24*1	290*595*20	0.16	1240	40	1550	60
		20*24*1	493*595*20	0.28	2110		2640	
		24*24*1	595*595*20	0.34	2540		3180	
		12*24*2	290*595*46	0.16	1240	65	1550	95
		20*24*2	493*595*46	0.28	2110		2640	
		24*24*2	595*595*46	0.34	2540		3180	
	Pleated	12*24*2	290*595*46	0.36	1240	40	1550	62
		20*24*2	493*595*46	0.61	2110		2640	
		24*24*2	595*595*46	0.74	2540		3180	
Washable	Pleated	12*24*1	290*595*20	0.28	1240	80	1550	105
		20*24*1	493*595*20	0.49	2110		2640	
		24*24*1	595*595*20	0.56	2540		3180	
		12*24*2	290*595*46	0.46	1240	45	1550	60
		20*24*2	493*595*46	0.72	2110		2640	
		24*24*2	595*595*46	0.92	2540		3180	

Recommended final pressure: 180Pa

※ Pressure range ±15%.

Different sizes and specifications are available

Applications

Prefilters are generally used as primary filtration in central air conditioning and central ventilation systems, gas turbines, and air compressors.

Materials

	Replaceable		Washable	
	Chip	Pleated		Pleated
Frame	Extruded aluminum, galvanized steel sheet	Extruded aluminum, galvanized steel sheet	Frame	Extruded aluminum, galvanized steel sheet
Media	Polyester	Polyester	Media	Polyester
Support	φ 3.2 Wire	φ 3.2 Wire	Face net	Spot mesh, expanded mesh
Face net	Spot mesh	None		

Fleco Int'l Corp.

Kunshan Fleco Filtration Co., Ltd.

Address: 1893-1 Huanqing Road, Kunshan, Jiangsu, China Zip: 215316

TEL: 86-(0)512-57759300 FAX: 86-(0)512-57759336

E-mail: sales@flecofiltration.com.cn Website: www.flecofiltration.com.cn